


DIGITAL CALIPERS WITH INTERCHANGEABLE BALL TIPS


DATA
OUTPUT

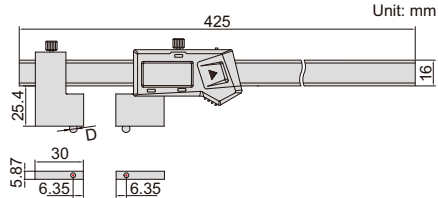

ball tips are optional

1528-3001

preset buttons




- Resolution 0.01mm/.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032, data output
- Made of stainless steel
- Optional accessory: ball tips

Ball tips (optional, supplied in pair)




1527-T101



type A



1527-T104



type B

With data interface (data output cable code 7315-21, 7302-21, optional)

| Code | Range | Accuracy |
|-----------|-----------------|----------|
| 1528-3001 | (12.7+D)~300mm* | ±0.03mm |

Built-in wireless (receiver code 7315-2 or 7315-3 is required)

| Code | Range | Accuracy |
|-------------|-----------------|----------|
| 1528-3001WL | (12.7+D)~300mm* | ±0.03mm |

*"D" is the diameter of ball tips.

| Code | Diameter (D) | Accuracy of diameter | Type | Material |
|-----------|-------------------|----------------------|------|-----------------|
| 1527-T101 | 1/16" (Ø1.5875mm) | ±0.005mm | A | Ruby |
| 1527-T102 | 1/8" (Ø3.175mm) | ±0.005mm | B | Stainless steel |
| 1527-T103 | 3/16" (Ø4.7625mm) | ±0.005mm | B | Stainless steel |
| 1527-T104 | 1/4" (Ø6.35mm) | ±0.005mm | B | Stainless steel |
| 1527-T105 | 3/8" (Ø9.525mm) | ±0.005mm | B | Stainless steel |
| 1527-T106 | 1/2" (Ø12.7mm) | ±0.005mm | B | Stainless steel |