



SPLIT TYPE DIAL BORE GAGES




dial indicator
is optional

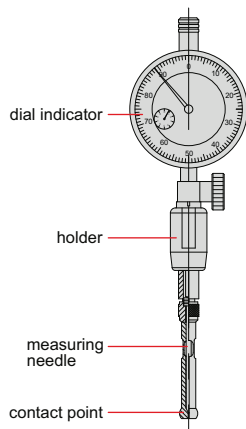

- Split type contact points
- Accuracy (without indicator):
3µm (measuring range 0.95~10mm),
4µm (measuring range 10~20.6mm)
- Repeatability (without indicator): 1µm
- Optional accessory:
digital/dial indicators or dial comparator

principle of measurement



(mm)

Code	Contact point				Measuring needle	Setting ring		
	Measuring range	Measuring depth (L1)	Total length (L)	Material of points		Code	Code	Diameter
2426-1	0.95-1.15	13	89	carbide	2426-N1D4	6312-1	1	
2426-1D1	1.07-1.25	13	89	carbide		6312-1D1	1.1	
2426-1D2	1.17-1.35	13	89	carbide		6312-1D2	1.2	
2426-1D3	1.27-1.45	13	89	carbide		6312-1D3	1.3	
2426-1D4	1.37-1.55	13	89	carbide	2426-N2D25	6312-1D4	1.4	
2426-1D75	1.5-1.9	17	93	carbide		6312-1D75	1.75	
2426-2	1.8-2.2	17	93	carbide		6312-2	2	
2426-2D25	2.05-2.45	17	93	carbide		6312-2D25	2.25	
2426-2D5	2.3-2.7	25	101	carbide	2426-N4	6312-2D5	2.5	
2426-2D75	2.55-2.95	25	101	carbide		6312-2D75	2.75	
2426-3	2.8-3.2	25	101	carbide		6312-3	3	
2426-3D25	3.05-3.45	25	101	carbide		6312-3D25	3.25	
2426-3D5	3.3-3.7	25	101	carbide	2426-N9	6312-3D5	3.5	
2426-3D75	3.55-3.95	25	101	carbide		6312-3D75	3.75	
2426-4	3.8-4.2	25	101	carbide		6312-4	4	
2426-4D5	4.15-4.8	41	118	hard chromed		2426-N20	6312-4D5	4.5
2426-5	4.7-5.3	41	118	hard chromed	6312-5		5	
2426-5D5	5.2-5.8	41	118	hard chromed	6312-5D5		5.5	
2426-6	5.7-6.3	41	118	hard chromed	6312-6		6	
2426-6D5	6.2-6.8	41	118	hard chromed	2426-N9	6312-6D5	6.5	
2426-7	6.7-7.3	41	118	hard chromed		6312-7	7	
2426-7D5	7.2-7.8	45	118	hard chromed		6312-7D5	7.5	
2426-8	7.7-8.3	45	118	hard chromed		6312-8	8	
2426-8D5	8.2-8.8	45	118	hard chromed	2426-N9	6312-8D5	8.5	
2426-9	8.7-9.3	45	118	hard chromed		6312-9	9	
2426-10	9.2-10.5	45	118	hard chromed		2426-N20	6312-10	10
2426-11	10.2-11.5	45	118	hard chromed			6312-11	11
2426-12	11.2-12.5	45	118	hard chromed	6312-12		12	
2426-13	12.2-13.5	45	118	hard chromed	6312-13		13	
2426-14	13.4-14.6	45	118	hard chromed	2426-N20	6312-14	14	
2426-15	14.4-15.6	45	118	hard chromed		6312-15	15	
2426-16	15.4-16.6	45	118	hard chromed		6312-16	16	
2426-17	16.4-17.6	45	118	hard chromed		6312-17	17	
2426-18	17.4-18.6	45	118	hard chromed	2426-N20	6312-18	18	
2426-19	18.4-19.6	45	118	hard chromed		6312-19	19	
2426-20	19.4-20.6	45	118	hard chromed		6312-20	20	



2426-HOLDER1



2426-HOLDER2

HOLDER

Code	Retraction	Applicable points
2426-HOLDER1	without	all
2426-HOLDER2	with	all